


**DETAIL - 21: TOTTURF SYNTHETIC PLUS with FALL HEIGHT ATTENUATION & NAIL BOARD**

(Detail is N.T.S.)

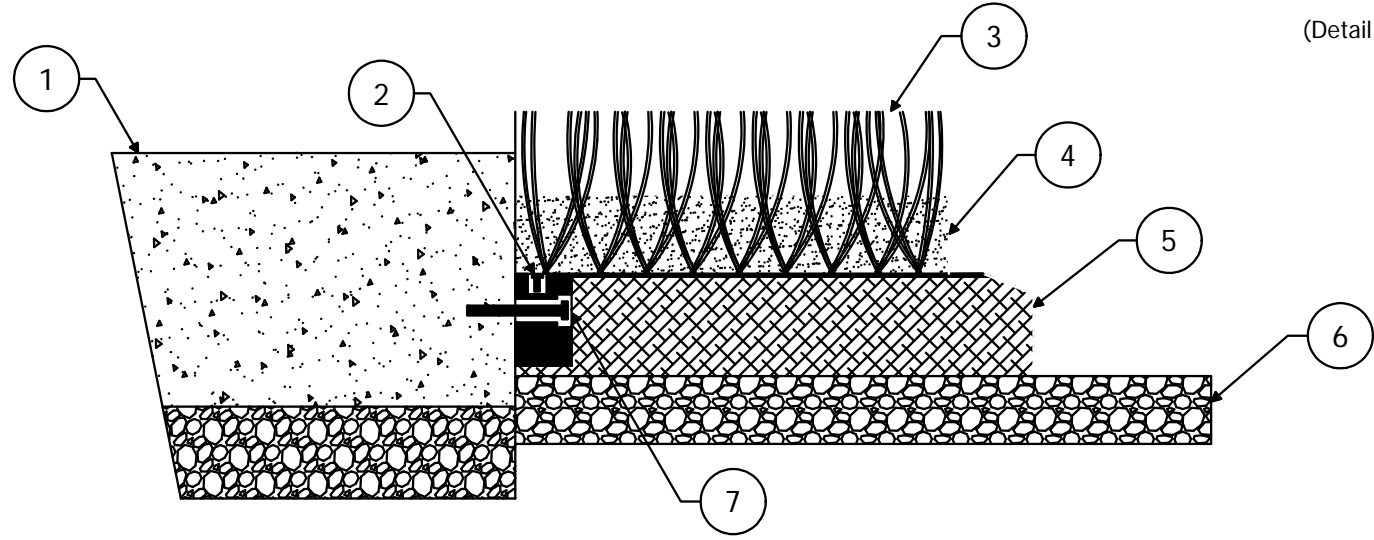

- 1) Concrete Border/Walk
- 2) Nail or Staple to Secure Turf
- 3) 1.75" ± .25" Synthetic Turf, Install Per Manufacturer's Specs.
- 4) .5" - .75" Synthetic Infill
- 5) Poured-In-Place Shredded SBR Cushion Layer (Depth Varies Depending Upon Fall Height of Equipment)
- 6) 4" Min. Sub-Base (Concrete, Asphalt, or 95% Compacted Aggregate Installed in 2-2" Lifts), Slope 2% Max.
- 7) Turf Nail Board Secured to Border. (if specified)

(NO SCALE)

**DATE: 02/17/10**

SIGNED: \_\_\_\_\_  
TITLE: \_\_\_\_\_  
DATE: \_\_\_\_\_