


Robertson Industries, Inc. ~ A PlayCore Company

**DETAIL - 3: POST EDGE INSTALLATION**

(Detail is N.T.S.)

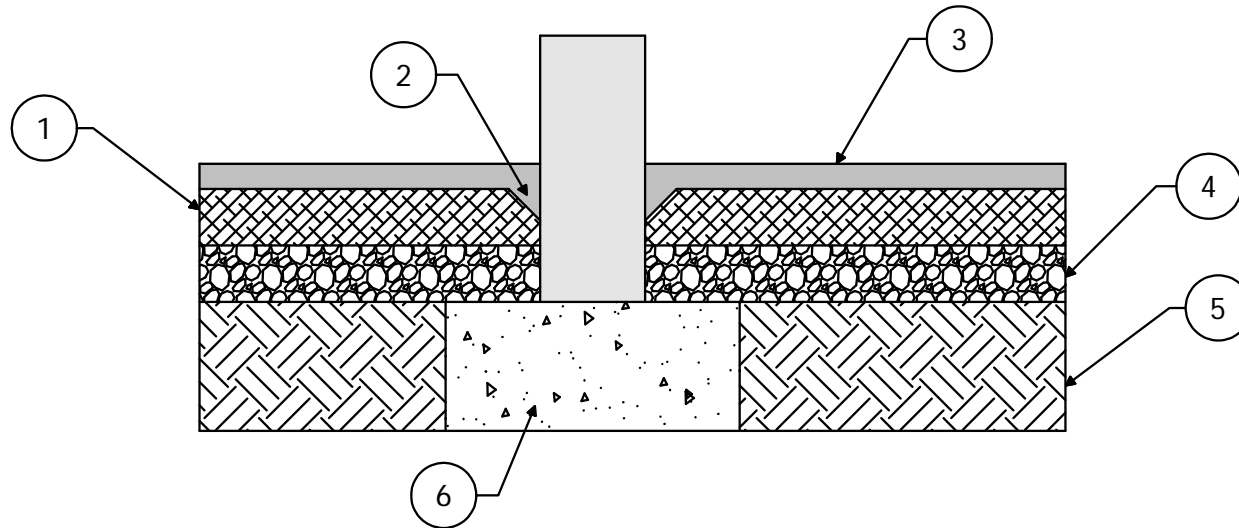

1) Poured-In-Place Shredded SBR Cushion Layer (Depth Varies Depending Upon Fall Height of Equipment)

2) Cushion Layer Tapered at Post, Minimum 2"

3) Poured-In-Place Wear Course, (2% Max Slope) Wear Course Depth Varies Based on Product Sold

4) 4" Min. Sub-Base (Concrete, Asphalt, or 95% Compacted Aggregate Installed in 2-2" Lifts), Slope 2% Max.

5) Existing Earth, 95% Compacted Sub-Grade, Slope 2%

6) Equipment Footing

(NO SCALE)

DATE: 02/17/10

SIGNED: \_\_\_\_\_  
TITLE: \_\_\_\_\_  
DATE: \_\_\_\_\_