


DETAIL - 16: SYNTHETIC PLUS TO PIP EDGE

(Detail is N.T.S.)

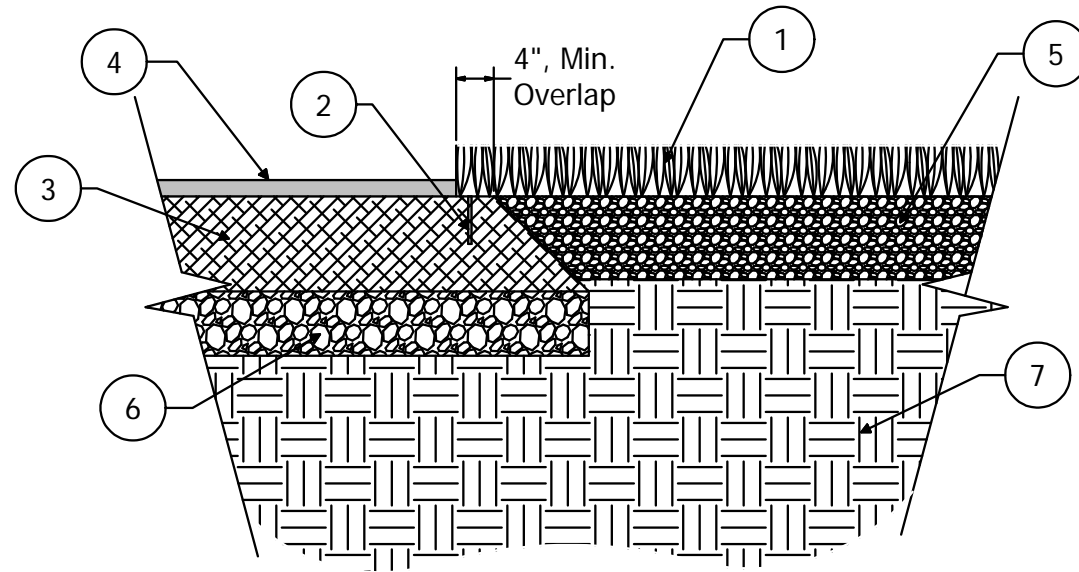

- 1) 1.75" ± .25" Synthetic Turf
- 2) Optional Landscape Nails (1' Min. O.C.)
- 3) Poured-In-Place Shredded SBR Cushion Layer (Depth Varies Depending Upon Fall Height of Equipment)
- 4) Poured-In-Place Wear Course, (2% Max Slope). Wear Course Depth Varies Based on Product Sold
- 5) .25" Minus Aggregate Sub-Base (2" Thk., Min.) Compact To 95%
- 6) 4" Min. Sub-Base (Concrete, Asphalt, or 95% Compacted Aggregate Installed in 2-2" Lifts), Slope 2% Max.
- 7) Existing Earth, 95% Compacted Sub-Grade, Slope 2%

(NO SCALE)

DATE: 02/17/10

SIGNED: _____
TITLE: _____
DATE: _____